

# Application Note


## Gowin TEC0117 Blinker

### Introduction

If you just bought the TEC0117 Littlebee board, you can follow this small Application Note to go through the whole process of setting up the Gowin tools, creating a simple project and testing it on the FPGA board. The design is a simple 27 bits binary counter (running at **100 MHz**) driving LEDs.


### Install Gowin EDA (IDE) under Windows

- Download the [TEC0117 Schematics](#) from the Trenz website (to view the pins assignment).
- Make sure you have admin rights on your PC !
- Register, then download Gowin **Standard Edition** from the GowinSemi [Website](#). (do **not** select the Education version !).
- Unpack the installation zip file and **run the executable**. At the end, choose to install the FTDI drivers for Windows7/8/10/11 (not Windows XP). A Gowin icon should have been placed on your desktop.
- Verify that the board is recognized under Windows : plug the TEC0117 in a USB port. Open Windows Device Manager and check that you have now two new Serial Ports. If not, try to (re-)install the FTDI drivers.

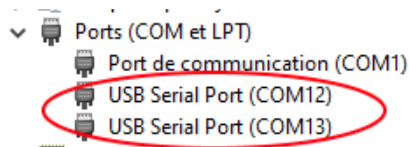

☞ If you have other FTDI peripherals (like USB-RS232 adapters), unplug them.

- Check your HostId : `ipconfig /all` then note the Physical Address of your main Ethernet Adapter. This will look like this : "00-E0-3D-69-17-35".
- Request a License ("Apply License" page). Use the above information as "PC MAC Address". Type of license = **Local**. Software = **GOWIN EDA**. After a few minutes you will receive an email with 4 attachments. Ignore the images and copy the license file named `gowin_E_xxxxxxxx.lic` under the Gowin installation directory. The other licence file (no `_E_`) is for older versions.
- Launch Gowin. It will fail in the absence of selected license file, and it will open the License Manager. **Browse** to select your license file (the one with `_E_`, copied under the install directory), then **Check** that it is correctly recognized.

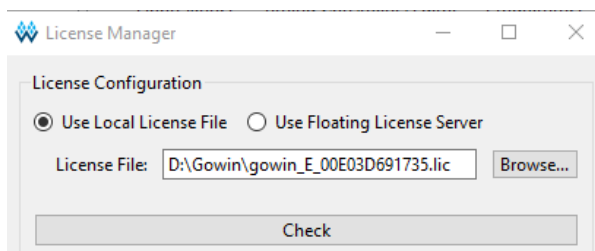

- Try again to launch Gowin EDA : it should open and be operational. You're good to go !

# Create your first design

- Launch **Gowin EDA**. Quick Start : **New Project**.

- Name = **test**, Create In = **c:\gowin\TEC0117**  
Select Device = **GW1NR-LV9QN88C6** - Finish

Name:	test
Create in:	c:\gowin\TEC0117

- Right-click in the Design pane : **New File** → **Verilog File**. Name = **blink** (Add to current project)  
Enter the following SystemVerilog code (cut & paste) then save it (Ctrl-S) :

```
module blink (input logic CLKX, output logic [1:2] LED);  
  logic [26:0] Cntr;  
  always_ff @(posedge CLKX) Cntr <= Cntr + 1'b1;  
  assign LED = Cntr[26:25];  
endmodule
```

- Right-click in the Design pane : **New File** → **Physical Constraints File**. Name = **blink**  
Enter the following Constraints (cut & paste) then save the file (Ctrl-S) :

```
IO_LOC "CLKX" 63;  
IO_PORT "CLKX" PULL_MODE=UP;  
IO_LOC "LED[1]" 86;  
IO_LOC "LED[2]" 85;  
IO_PORT "LED[1]" PULL_MODE=UP DRIVE=8;  
IO_PORT "LED[2]" PULL_MODE=UP DRIVE=8;
```

- Right-click in the Design pane : **New File** → **Timing constraints File**. Name = **blink**  
Enter the following SDC code (cut & paste) then save the file (Ctrl-S) :

```
create_clock -name CLK -period 10 [get_ports {CLKX}]  
set_false_path -to [get_ports {LED*}]
```

- Activate the **Process** pane.

- Right-click on **"Synthesize"** then **Configuration**.

Top Module = **blink**

Select Verilog language = **"System Verilog 2017"**, then **Apply**.

- Double Click on **Synthesize** : it should compile without error.

Double Click on **Place & Route** : it should compile without error.

- Make sure the TEC0117 is plugged.

Double Click on **Program device** : the "cable" (the TEC0117 board) should be detected.

- The programming panel should look like this :

Gowin Programmer Version 1.9.8.06-1 build 20620

File Edit Tools About

		USB Cable Setting					
Enable	Series	Device	Operation	FS File	User Code	IDCODE	
1 <input checked="" type="checkbox"/>	GW1NR	GW1NR-9	SRAM Program	C:/gowin/TEC0117/test/impl/pnr/blink.fs	0x0000EC8C	1100581B	

- Click on **"Program/Configure"**

After a few seconds, the two rightmost LEDs closest to the switch should count (binary).

- You can inspect the various reports, view the schematics (RTL view), open the floorplanner...

- Assign the 8 LEDs : modify **output logic [1:8] LED** and : **LED = Cntr[26:19]**.

You can use the Floorplanner and the Package view to drag and drop the extra 6 LED ports to their location (84,83,82,81,80,79). You could also try with the 12 MHz clock (pin 35) for a slower pace.

- You can program the internal Flash so the board will power up with the blinker.

## Conclusion

I hope this small ApNote was useful to quickly become familiar with the Gowin environment.

Bert Cuzeau – A.L.S.E – FPGA.fr